

# CARGO 900 CATERING

80x120



ATP



## Insulated container for meals transport at controlled temperature

- Properly conceived for catering and banqueting operations.
- The practical **adaptors** inside the container allow the insertion of **GN pans** of different heights and **GN trays**.
- 900 litres capacity.
- Total compliance with the cold chain at all stages of transport.
- It can be transported using conventional vehicles: it allows to simultaneously transport hot, chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.


### MANUFACTURING MATERIALS

<b>Polyethylene</b>	inner and outer walls of the container and the door; suitable for food contact	<b>Polyurethane</b>	insulating material between the walls of the container and the door; free of CFC and HCFC
<b>Silicone</b>	seal	<b>Nylon</b>	runners
<b>Galvanised steel</b>	support runners	<b>Stainless steel</b>	handling handles, closing handle, inner rod of the door, hinge rod, GN adaptors

## TECHNICAL CHARACTERISTICS


	<p>4 castors of 125 mm diameter (2 fixed and 2 swivel of which one equipped with a brake). Support runners plate integrated in the container.</p>		<p>Label holder (on request) for the identification of the content or destination. Suitable for A5 format documents.</p>
	<p>Ergonomic handle closing.</p>		<p>Handle prepared for the use of tamper-proof system.</p>
	<p>Eutectic plates, to increase temperature retention performance over time (on request).</p>		<p>Available (on request) towing set to move more than one container at the same time.</p>
	<p>Analog thermometer installed in the door (on request).</p>		<p>Polycarbonate GN pans of different heights. Melform exclusive design.</p>
	<p>Internal grooves improving good air circulation.</p>		<p>Door opens up to 270° with door retaining catch.</p>
	<p>Easily removable door seal.</p>		<p>Stainless steel rod with 2 hooks integrated inside the door.</p>
	<p>Mono-block structure, no sharp edges, joints and welds.</p>		<p>Insulated with CFC and HCFC-free polyurethane foam.</p>
<p style="font-size: 2em; font-weight: bold; text-align: center;">K</p>	<p>Overall heat transmission coefficient: <b>K = 0.33 W/m<sup>2</sup>K</b></p>	<p style="font-size: 2em; font-weight: bold; text-align: center;">°C</p>	<p>Guaranteed for use: <b>from -30° to +100° C.</b></p>

## TECHNICAL SPECIFICATIONS

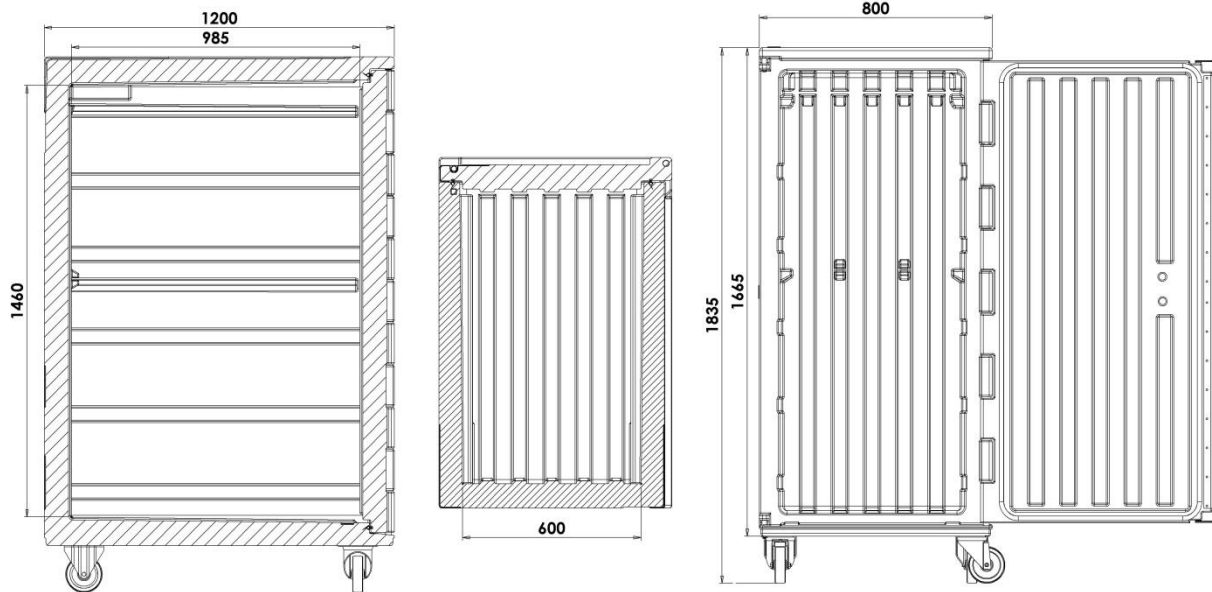


## ADAPTORS FOR GN PANS

### H65

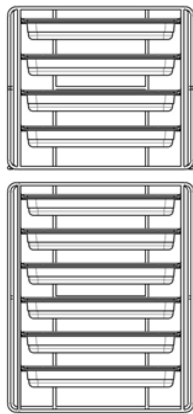


Capacity: 30 units

### H100

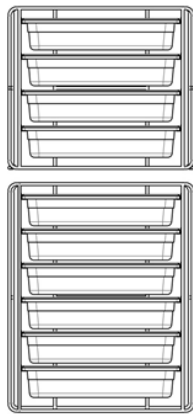


Capacity: 30 units

### H150

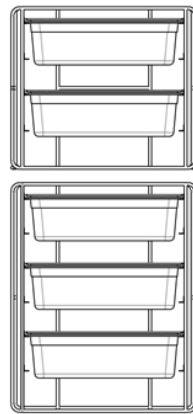

Capacity: 15 units

### H200

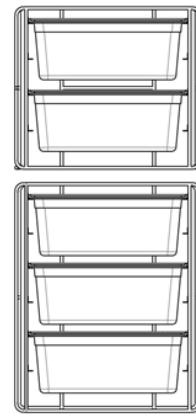

Capacity: 15 units

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Cargo 900 Catering <b>with castors</b> (with GN adaptors)	09000082	Light blue	800x1200xh1835	600x985xh1460	900	145
Label holder	AMC101	Transparent	173xh200	148xh210 -A5-		
6 guides lower <b>GN adaptors</b> <b>Stainless steel</b>	AAA035	Stainless	625x970xh770			18
4 guides upper <b>GN adaptors</b> <b>Stainless steel</b>	AAA055	Stainless	625x970xh545			15,4